

















The V 2000 iQ's technology is proven to deliver superior and measurable performance, ensuring airflow and filtration is maintained even when particulates start to build up. It's thanks to the vacuum/ pressure which is three times greater than that of its predecessor, the V 2000. This makes it suitable for the most demanding and complex installations, so you can rely on extended filter life, together with effective removal of fumes and particulates.

It's user friendly too, with a design that makes easy work of filter changes. And the easy to read and access controls display panel is conveniently located on top of the unit. The iQ Operating System is Patent-protected and has received global acclaim for its ability to maximise manufacturing performance and continuity of production.

The V 2000 iQ's design also permits greater flexibility of different exhaust installations. Different exhaust configurations allow recirculation via the rear panel or externally vented hose connection systems.

## STANDARD FEATURES:


- iQ Operating System
- **Automatic Flow Control**
- 2 x DeepPleat DUO pre filters
- Reverse Flow Air technology
- Combined HEPA/Gas filter incorporating ACF technology
- Blowers with high airflow and vacuum levels
- High contrast display
- Real time airflow reading
- Filter status warnings
- Remote data diagnostics via
- Independent filter condition monitoring

- Long life filters with low replacement costs
- 'Run safe' operation (filters must be installed correctly for the unit to operate)

## **OPTIONAL FEATURES:**

- Remote stop / start interface
- Filter change / System fail signal
- VOC gas sensor (Volatile Organic Compound)
- On-board compressor

The V 2000 iQ fume extraction unit for the electronics industry packs a heavyweight punch with unsurpassed filter capacity and high performance.

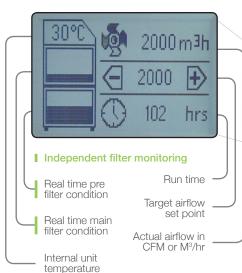











Patented Technology - Patent No: GB2 499 812

http://www.bofa.co.uk/igOperationSystem.asp

UNIT - PART NUMBERS				
Model	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitor
V 2000 iQ Powder Coated	E1743	A2001	A2002	A2003

REPLACEMENT FILTERS - PART NUMBERS				
Model	Twin Pack DeepPleat DUO Pre Filters	Twin Pack Combined HEPA/Gas Filters		
V 2000 iQ	A1030336	A1030335		


TECHNICAL DATA	
	170 - 440V
Dimensions (HxWxD)	1277 x 1318 x 1013mm (50.3 x 51.9 x 39.9")
Cabinet Construction	Powder coated mild steel
Airflow / Pressure	2200m³/hr / 96mBar (1295cfm / 96mBar)
Electrical Data	(EU) 415V / 3Ph / 50Hz / 6.6kw / 16A / L1, L2, L3 14A - N 28A (USA) 208V / 3Ph / 60Hz / 6.6kw / 20A / L1, L2, L3 24A - N 35A
Noise Level	< 62dBA*
Weight	340kgs (750lbs)

<sup>\*</sup> At typical operating speed.

2 X DEEPPLEAT DUO PRE FILTER SPECIFICATIONS		
Surface Media Area	30m² approx (60m²)	
Filter Media	Glass Fibre	
Filter Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec mild steel	
Filter Efficiency	F8 (95% @ 0.9 microns)	

2 X COMBINED HEPA/GAS FILTER SPECIFICATIONS		
Surface Media Area	7.5m <sup>2</sup> approx (15m <sup>2</sup> )	
HEPA Filter Media	Glass Fibre	
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec Mild Steel	
Treated Activated Carbon	34kgs (68kgs)	
Filter Efficiency	99.997% @ 0.3 microns	

## AIRFLOW THROUGH FILTERS

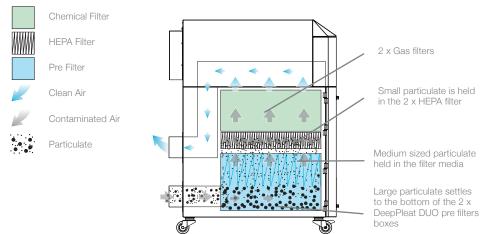

## TECHNICAL SPECIFICATION



- 1 iQ Display
- Standby button 3 Signal / Interface Cable
- 4 Power Cable
- 5 Locking Castors
- 6 Door Hinges
- Hose Inlet Connections - 125mm
- 8 Optional Exhaust Outlet Connections - 125mm
- 9 Removable front panel 10 Door Latches
- 11 On / Off Switch

